

VISIT...

LANZAROTE
Caliente.COM

AQUAPANEL®

Rustproofed Screws

For AQUAPANEL® Cement Board Outdoor



AQUAPANEL® Rustproofed Screws have been specially developed for fixing AQUAPANEL® Cement Board Outdoor to timber substructures. The screw length L = 40 mm.

Characteristics

The screws are made from V2A stainless steel. The AQUAPANEL® Rustproofed Screw has a hilo thread which ensures optimum grip in timber substructures.

The screw also has milled ribs to the edge of the screw head, thereby ensuring that the screws can be screwed and countersunk.

The drive is TX20, to ensure easy screwing.

Processing

The screws are installed flush so that the screw heads are level with the plane of the board with screw spacing ≤ 250 mm. Note the spacing from the edges of minimum 15 mm. The use of screwdrivers with depth control is recommended.


Coverage

Wall: 15 screws/m², stud spacing 60 cm
25 screws/m², stud spacing 30 cm
Ceiling: 25 screws/m², stud spacing 30 cm

Method of delivery

AQUAPANEL® Rustproofed Screw SN 40: 250 pcs/pack

Item code: 87197

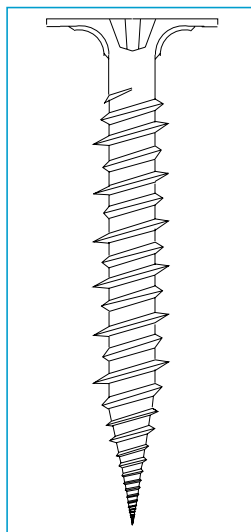

Rustproofed Screws